
FLEXIPORT[™] TUBE SET REFERENCE CHART

| N | Part Iumber | Fitting(s)/Tubing/Adapter | Unit of Measure | Tube | Connector(s) | Monitor Compatibility |
|---------------------|----------------|---------------------------|--------------------|---------|--|--|
| 1-B | BARB | | 10 | (1) 8" | Double hose barb (5082-171) | This is used to semipermanently connect the FlexiPort fitting to any one-tube device. It requires removing the original fitting from the device tube. |
| 1-S | C | | 10 | (1) 8" | Screw (5082-164) | One-tube screw-type devices (e.g., Welch Allyn Spot, Welch Allyn VSM, Welch Allyn Atlas) |
| 1-M | 1Q | | 10 | (1) 8" | Locking (5082-191) | Welch Allyn one-tube locking-type devices |
| 1-H 1-H | IP | | 10 | (1) 8" | Bayonet (5082-190) | One-tube Bayonet-type devices (e.g., HP, Philips, Spacelabs, DataScope) |
| b 1-TI | PS | | 10 | (1) 24" | Tri-purpose (5082-168) | One-tube hand aneroid devices |
| 1-TI | PSE | | 10 | (1) 24" | Tri-purpose (5082-168) Bagged | European hand aneroid devices |
| 1-TI | PL | | 10 | (1) 31" | Tri-purpose (5082-168) | One-tube hand aneroid devices |
| 1-TI | PLE | | 10 | (1) 31" | Tri-purpose (5082-168) Bagged | European hand aneroid devices |
| 2-E | BARB | | 10 | (2) 8" | Double hose barb (5082-171) | This is used to semipermanently connect the FlexiPort fitting to any two-tube device. It requires removing the original fittings from the device tubes. |
| 2-5 | 5C | | 10 | (2) 8" | Screw (5082-164) | Two-tube screw-type devices (e.g., Critikon Dinamap) |
| 2-S | SCC | | 10 | (2) 8" | Screw (5082-164) Clamp on tube | Two-tube screw-type devices (e.g., Critikon Dinamap). When Clamp is activated, this can be used with one- tube devices (e.g., Welch Allyn Spot, Welch Allyn VSM, Welch Allyn Atlas) |
| 2-N egn - 2-N | MQ | | 10 | (2) 8" | Locking (5082-191) | Two-tube locking-type devices (e.g., Spot LXi, GE Marquette) |
| nL-0 2-N | ٩F | | 10 | (2) 8" | Locking (Male 5082-172 and Female 5082-191) | Two-tube mated locking-type devices (e.g., Datex Ohmeda) |





| <u>.</u> | | | | | |
|-----------------|----------|--|---|--|---|
| Other Accessori | 5082-159 | | 1 | Wash cap that teathers to FlexiPort on cuffs | This allows users to close off the FlexiPort during washing. Also can be used to prevent debris from entering the port. |
| | 1SRCL | | 1 | DuraShock Classic Adapter with one 24" tube and a large bulb with premi- um valve | For DS48 Integrated Gauges to allow them to work with FlexiPort cuffs. |
| | 1SRCS | | 1 | DuraShock Classic Adapter with one 24" tube and a small bulb with premi- um valve | For DS48 Integrated Gauges to allow them to work with FlexiPort cuffs. |
| | 1DSAL | | 1 | DuraShock Adapter with one 24" tube and a large bulb with premium valve | For DS45 Integrated Gauges to allow them to work with FlexiPort cuffs. |
| | 1DSAS | | | DuraShock Adapter with one 24" tube and a small bulb with premium valve | For DS45 Integrated Gauges to allow them to work with FlexiPort cuffs. |
| | 1DSLC | | 1 | DuraShock Adapter with one 24" tube and a economy bulb& valve" | For DS44 Integrated Gauges to allow them to work with FlexiPort cuffs. |

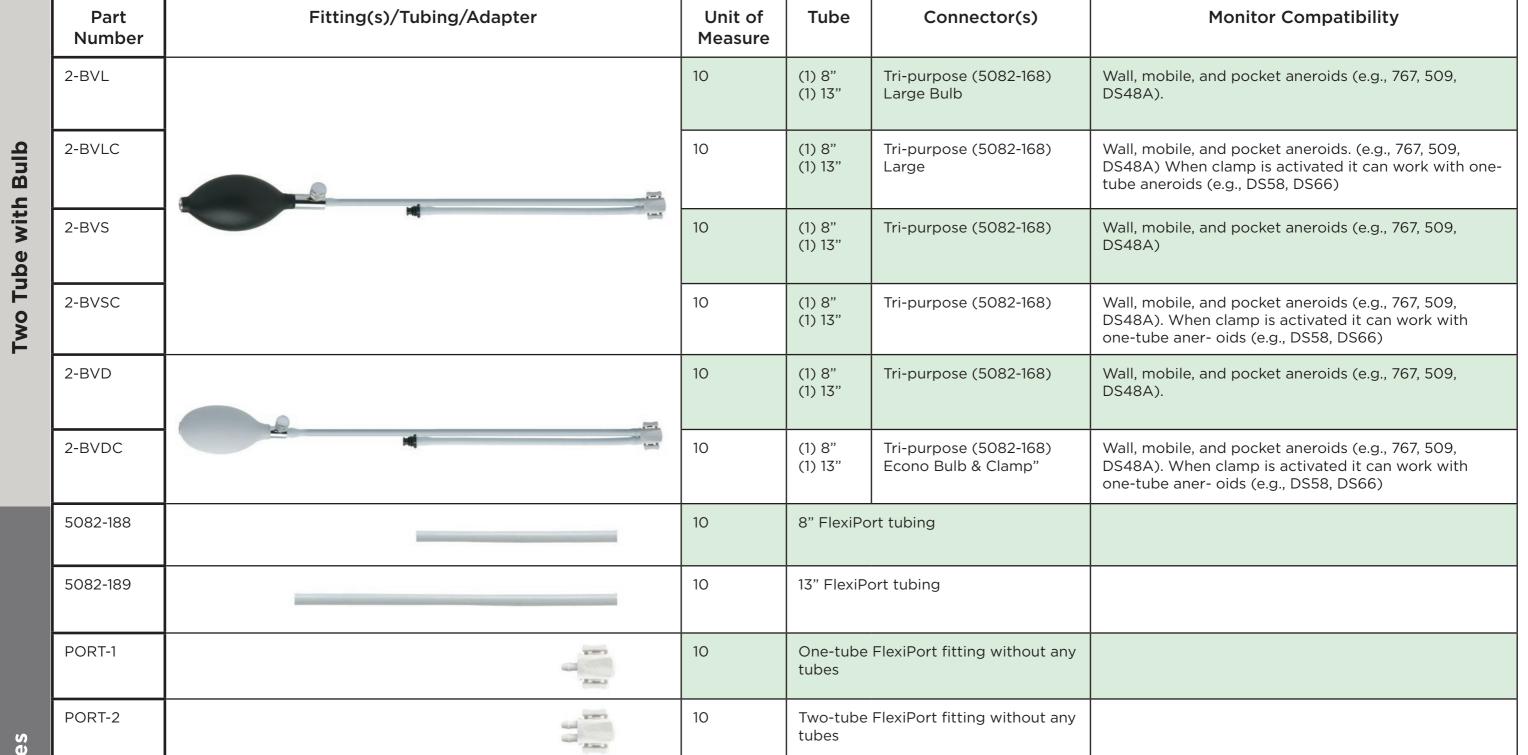